


Opening the way...



RAM 5700

Commercial Industrial

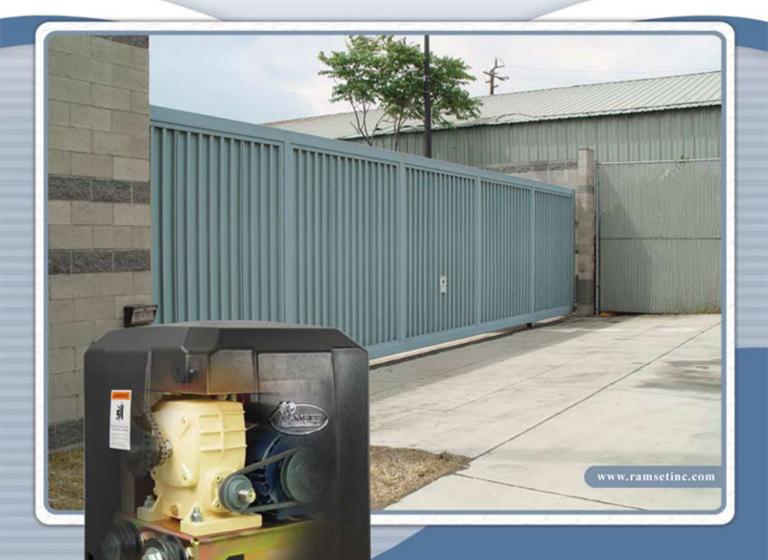

RAM 5700

Commercial / Industrial



SPECIFICATIONS:

MAXIMUM GATE WEIGHT: 5000 lbs.

MAXIMUM GATE TRAVEL: 65'

GATE TRAVELING SPEED: Approx. 1' per sec.

CYCLES: Continuous. SHIPPING WEIGHT: 135 lbs.

OPERATING TEMPERATURE: -10° F to 160° F

Electric Motor:

1 Hp, 220 VAC. 4.5 amp 50/60Hz, continuous duty with high speed ball bearings and resettable overload button.

Heavy Duty Worm Gear:

Lubricated in an oil bath for smooth and quiet operation.

Limit Switches:

Mechanical adjustment for accurate gate stop settings.

Finish:

Gold/Zinc plated to inhibit corrosion.

Cover:

High-impact resistant charcoal gray polyethylene.

Cover Dimenensions:

H: 25" L: 16 1/2" W: 18 1/2"

ADDITIONAL ACCESSORIES



Guide Rollers Heavy duty UHMW rollers. Lengths: 4", 6", 12" Colors: Black or white



ILD-24S Loop Detector A safety device that stops the gate from closing on a vehicle.



V Groove Wheels
Solid steel and
UHMW wheels.
Size: 4" & 6"
Color: Black or white



Fire Box

Allows the fire department to open your gate in case of an emergency.

RAMSET



Keypad
1,024 Codes
5,112 Event Log
LCD Display
7-Day Timer
Time Zones
Latching/ Hold Open
Stainless Steel Faceplate

7-YEAR WARRANTY COMMERCIAL

DISTRIBUTED BY: